


GLIDETECH[®] BUTYL HP

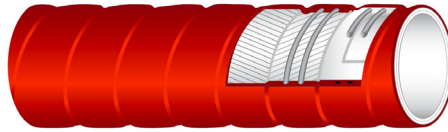

Premium grade low permeation extra flexible suction and delivery hose suitable for wine and spirits. Phthalates free.

DESCRIPTION

Tube

IIR, white. Meets FDA 21 CFR 177.2600, DM 21.03.73 E SEGUENTI AND JAPAN-MINISTRY OF HEALTH AND WELFARE NOTICE NO.370,1959 AND NO.201, 2006.

Reinforcement Cover

synthetic plies, steel wire helices
wide corrugated, red, low friction material, non-marking when dragged on the floor, oil, chemical and abrasion resistant, easy to clean.

Sterilization Marking

according to 3A Sanitary Standard Class II
TUDERTECHNICA GLIDETECH[®] BUTYL



TECHNICAL CHARACTERISTICS

Temperature range

-40°F/248°F (-40°C / +120°C)

Vacuum Norm

30.0 Inch HG (0.8 bar)

ISO 1307 for dimensional tolerances

3A Sanitary Standard Class II

Inside diameter		Outside diameter	Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[in]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
25	1	1.52	17	250	62	900	0,90	.60	105	4.13
38	1 ½	2.09	17	250	62	900	1,30	.87	120	4.72
51	2	2.66	17	250	62	900	1,99	1.34	150	5.91
63,5	2 ½	3.19	17	250	62	900	2,61	1.75	195	7.68
76	3	3.72	17	250	62	900	3,26	2.19	225	8.86
102	4	4.75	17	250	62	900	4,23	2.84	375	14.76

Other diameters, wall thickness, cover colors and pressure only on specific request.



tuderhose@crpindustries.com
www.crp tudertechnica.com

35 Commerce Drive
Cranbury, NJ 08512
Tel. (800)526-4066